



VIA Embedded Platform
www.viaembedded.com

Operating Guide

EPIA EN-Series Mini-ITX Mainboard

Table of Contents

Table of Contents	i
VIA EPIA EN-Series Overview	1
VIA EPIA EN-Series Layout	2
VIA EPIA EN-Series Specifications	3
VIA EPIA EN Processor SKUs	4
VIA CN700 Chipset Overview	5
VIA EPIA EN-Series I/O Back Panel Layout	6
VIA EPIA EN-Series Layout Diagram & Mounting Holes	7
VIA EPIA EN-Series Layout Diagram & Height Distribution	8
Power Consumption	9
VIA EPIA EN 12000.....	9
VIA EPIA EN 15000.....	10
Power Specifications	12
VIA EPIA EN-Series Microsoft and Linux Driver Support	13
MICROSOFT DRIVER SUPPORT.....	13
LINUX DRIVER SUPPORT	13
Contact	14


VIA EPIA EN-Series Overview

The VIA EPIA EN-Series Mini-ITX Mainboard is an ultra compact native x86 platform optimized for today's demanding embedded and productivity applications. The mainboard is based on the VIA CN700 chipset featuring an embedded hardware MPEG-2 accelerator and integrated VIA UniChrome™ Pro 2D/3D graphics for rich digital media performance. With the sizable memory bandwidth of DDR2 533MHz SDRAM DIMM and the high data transfer speeds of ATA-133 and further enhanced by support of 8-Channel AC'97 codec for Smart 5.1 surround sound and SPDIF, the VIA EPIA EN-Series delivers the increased performance levels required by today's embedded digital media applications.

The latest in high-bandwidth connectivity is supported with four USB 2.0 ports, as well as a COM port and has one 10/100/1000 Fast Ethernet port for extended broadband connectivity. The VIA EPIA EN-Series also has one PCI slot for expandability options. The VIA EPIA EN-Series is compatible with a full range of Mini-ITX chassis as well as FlexATX and MicroATX enclosures and power supplies.

The VIA EPIA EN-Series is fully compatible with Microsoft® and Linux operating systems and is available in a variety of configurations, including the fanless VIA Eden™ V4 Bus NanoBGA2 processor for silent system designs and the latest VIA C7™ V4 Bus NanoBGA2 processor for small, low power and secure x86 processor platforms.

VIA EPIA EN-Series Layout

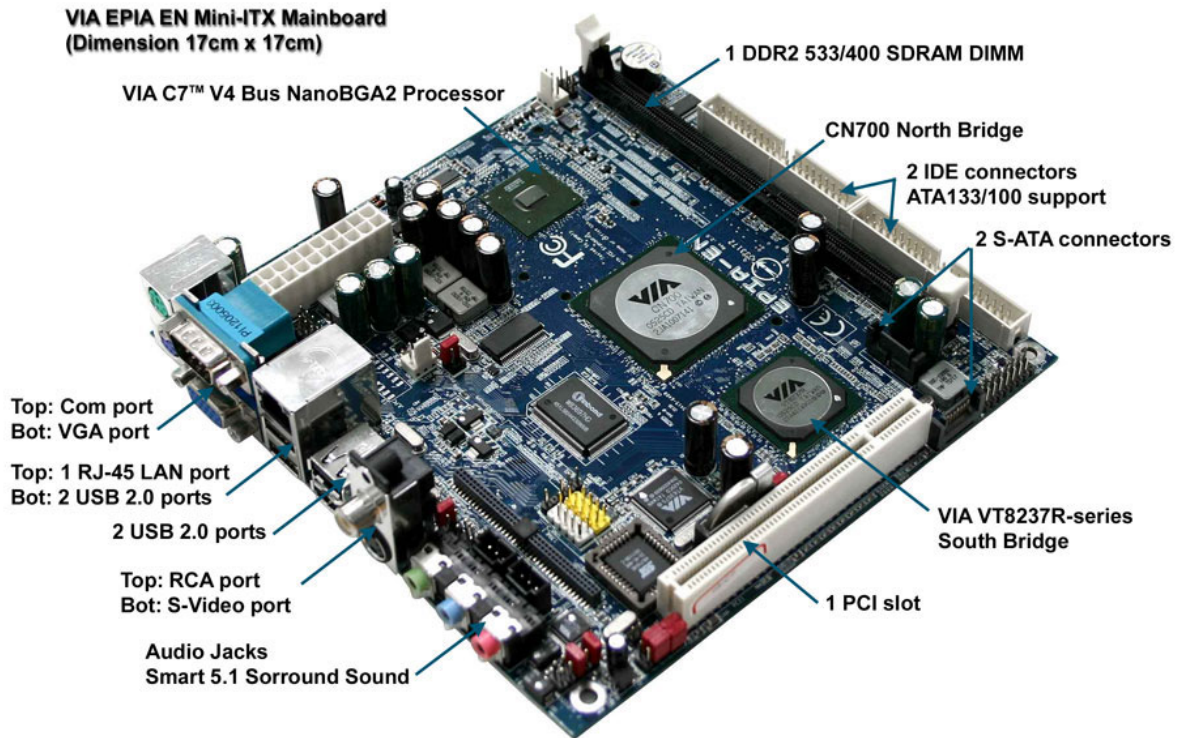

VIA EPIA EN-Series Specifications

Processor	- VIA C7 / Eden V4 Bus NanoBGA2 Processor
Chipset	- VIA CN700 North Bridge - VIA VT8237R-Series South Bridge
System Memory	- 1 DDR2 400/533 DIMM slot - Up to 1GB memory size
VGA	- Integrated VIA UniChrome™ Pro AGP graphics with MPEG-2 decoder
Expansion Slots	- 1 PCI
Onboard IDE	- 2 UltraDMA 133/100/66 Connectors
Onboard LAN	- VIA VT6122 Gigabit Ethernet Controller
Onboard Audio	- VIA VT1618 8-channel AC'97 Codec
Onboard TV Out	- VIA VT1625M HDTV Encoder
Onboard 1394	- VIA VT6307S IEEE 1394 Firewire
Onboard I/O Connectors	- 1 USB pin header for 2 additional USB 2.0 ports - 1 1394 pin header for a 1394 port - 1 SIR pin header (IRDA 1.0) - 2 S-ATA Connectors - 1 LPC pin header - 1 Front-panel audio pin header (Mic-in and Line-out) - 1 Serial port pin header for a second com port - 1 CIR pin header (Switchable for KB/MS) - 2 Fan connectors: CPU/Sys FAN - 2 S/PDIF connectors: (S/PDIF-in and S/PDIF-out) - 1 SM Bus pin header - 1 LVDS/TTL/DVI module connector (an add-on card is required) - 1 Front-Panel pin header - 1 ATX Power Connector
Back Panel I/O	- 1 PS2 Mouse port - 1 PS2 Keyboard port - 1 RJ-45 LAN port - 1 Serial port - 4 USB 2.0 ports - 1 VGA port - 1 RCA port (S/PDIF or TV out) - 1 S-Video port - 3 Audio jacks: line-out, line-in and mic-in (Horizontal, Smart 5.1 Support)
BIOS	- Award BIOS, LPC 4/8Mbit flash memory
Operating System	Windows 2000 / XP, Linux, Win CE, XPe
Software Application	- VIA FliteDeck™ Suite MissionControl-H/W Monitoring, Remote SNMP Management FlashPort-Live BIOS Flash SysProbe-Live DMI Browser
System Monitoring & Management	- CPU temperature reading, CPU voltage monitoring - Wake-on-LAN, Keyboard-Power-on, Timer-Power-on, Watch Dog Timer, FAN control - System power management, AC power failure recovery
Operating Temperature	0 ~ 50°C
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)
Form Factor	- Mini-ITX (6-layer) - 17 cm x 17 cm

* The specification is subject to change without prior notice.

VIA EPIA EN Processor SKUs

The VIA EPIA EN-Series is available in 1.2GHz and 1.5GHz speed grades. The VIA EPIA EN12000 and the VIA EPIA EN15000 both utilizes the most efficient VIA C7™ V4 Bus NanoBGA2 processor.



EPIA EN12000 / EPIA EN15000

VIA C7™ processor
1.2 GHz / 1.5 GHz
1.004v Operating Volts (1.2GHz)
128KB L1 Cache
128KB L2 Cache
MMX and SSE, SSE2 and SSE3
Padlock and ACE Encryption



Suitable for small, low power, ultra efficient and secure x86 platform.




PadLock ACE US government approved Advanced Encryption Standard (AES), performing cryptographic functions for securing e-mails, personal files, online transactions, and networks.



The VIA FliteDeck™ Suite, an advanced system management suite that enables user to effortlessly track and monitors mission critical system data and enable seamless live Windows®-based BIOS updates as well as comprehensive BIOS status information.


VIA CN700 Chipset Overview

The VIA CN700 Chipset is designed to enable high quality digital video streaming and DVD playback in a new generation of fanless, small form factor PCs and IA devices. The CN700 features the embedded VIA UniChrome™ Pro 2D/3D MPEG-2 accelerator, DDR2 533MHz support, motion compensation and duo-view support to ensure a rich overall entertainment experience. Outstanding connectivity features include USB 2.0, 10/100 LAN and ATA/133.

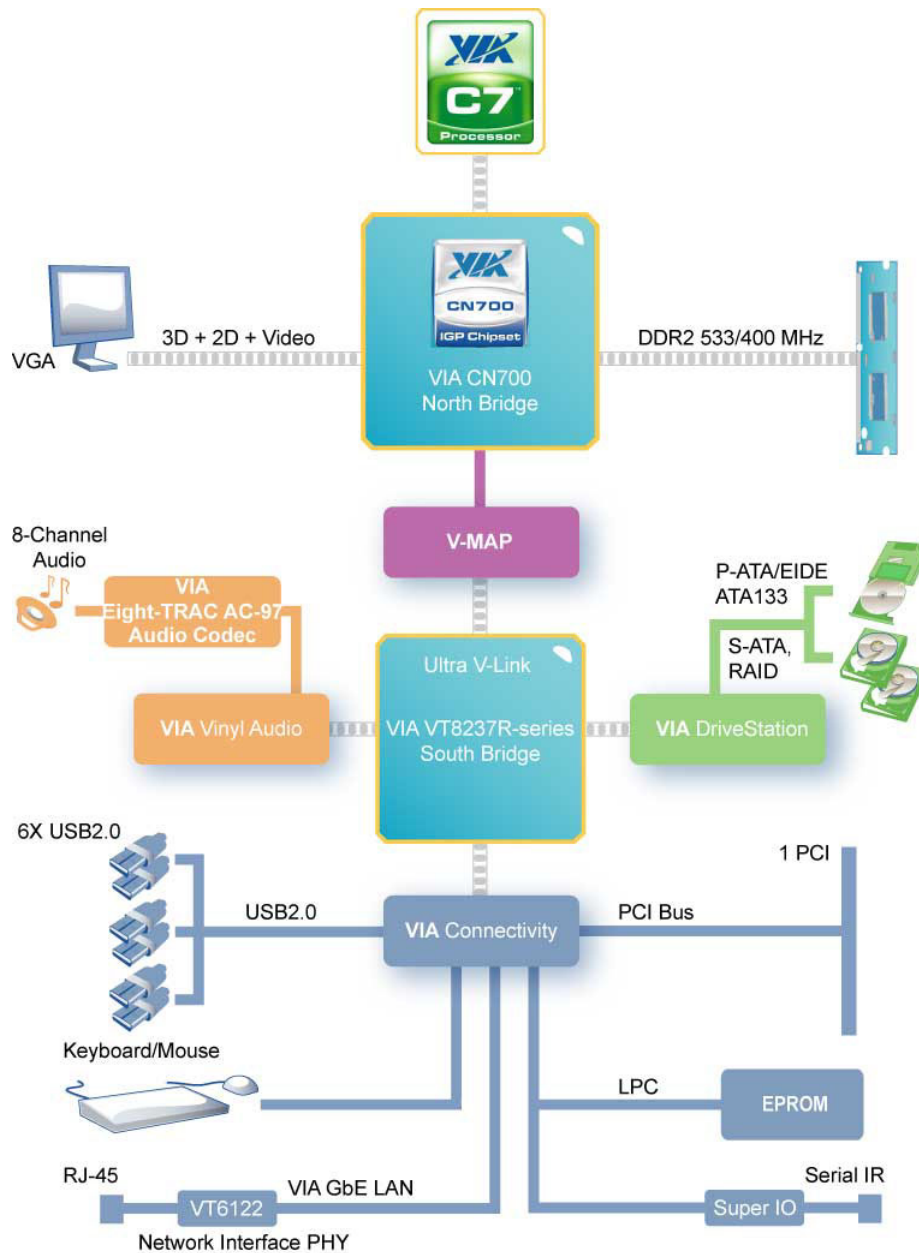


VIA EPIA EN-Series I/O Back Panel Layout


The EPIA EN's ultra compact 17cm x 17cm, integrated design supports all the standard legacy x86 connectivity options as well as PS2 Mouse port, PS2 Keyboard port, VGA port, COM port, RJ45 LAN port, USB 2.0 ports, RCA port, S-Video port and AC'97 audio jacks.

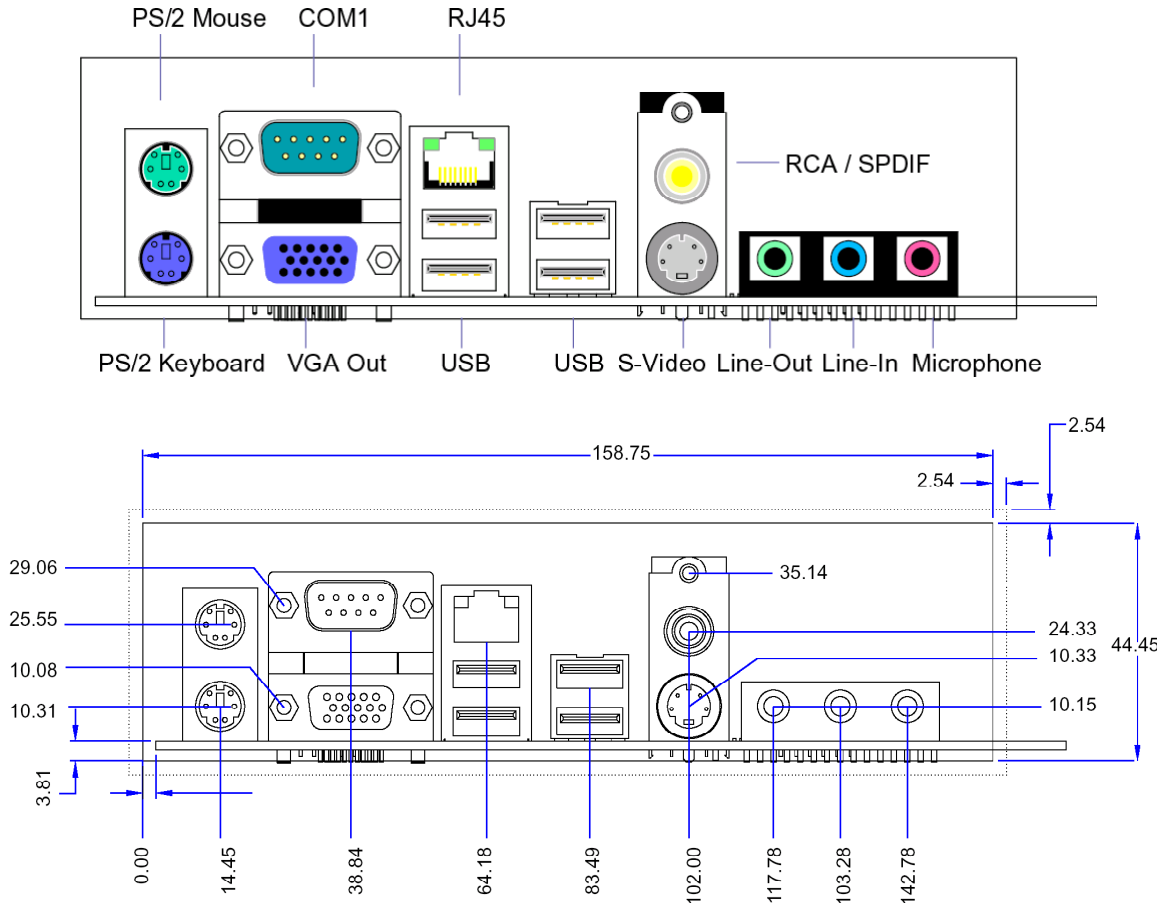

VIA EPIA EN-Series Layout Diagram & Mounting Holes

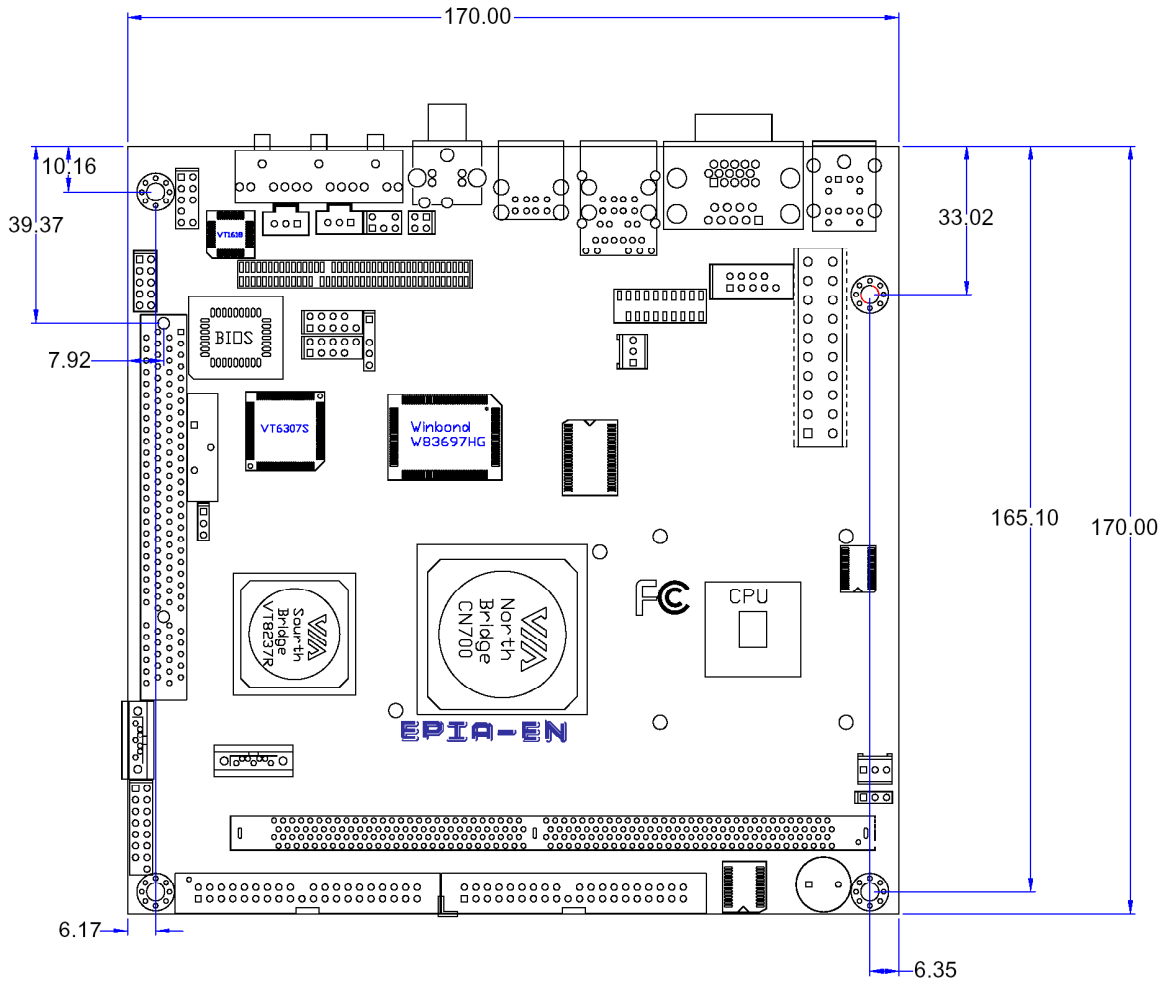

VIA EPIA EN-Series Layout Diagram & Height Distribution

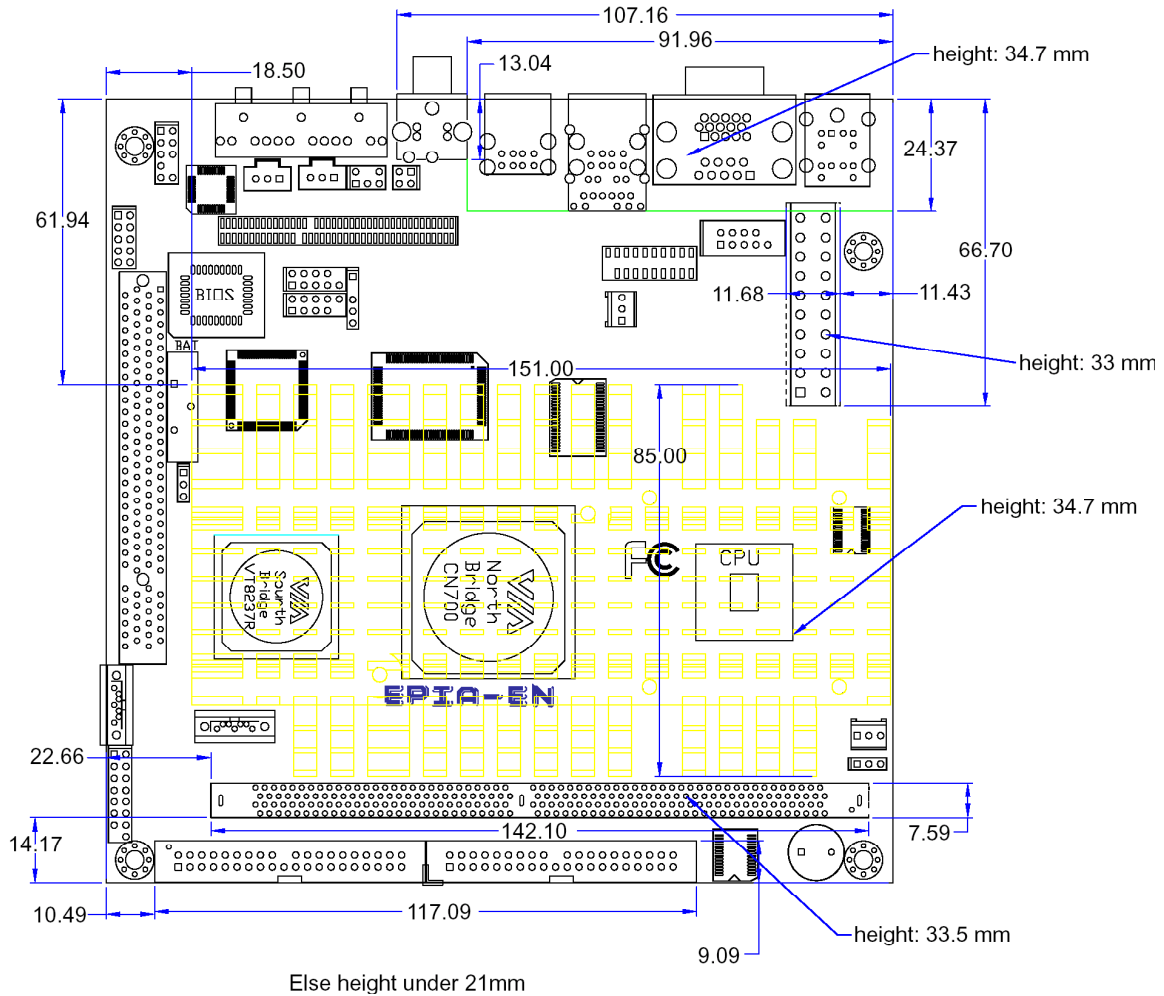

Power Consumption

Power consumption tests were carried out comparing the VIA EPIA EN12000 (running with the 1.2GHz VIA C7™ V4 Bus NanoBGA2 processor) and the VIA EPIA EN15000 (running with the 1.5GHz VIA C7™ V4 Bus NanoBGA2 processor). The following tables are a comprehensive breakdown of the EPIA platform's voltage, amp and wattage values while running common system applications.

VIA EPIA EN 12000

A. Playing DVD – Power DVD 4.0

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.385	1.058	3.581
Main Board +5V	5.072	1.544	7.831
Main Board 5VSB	5.066	0.182	0.922
Main Board +12V	12.214	0.164	2.003
Main Board Power Consumption			14.338

B. Playing MP3 – Media Player

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.380	1.060	3.583
Main Board +5V	5.070	1.538	7.798
Main Board 5VSB	5.062	0.183	0.926
Main Board +12V	12.200	0.165	2.013
Main Board Power Consumption			14.320

C. Running Network Application – Files Copy

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.383	1.031	3.488
Main Board +5V	5.079	1.237	6.283
Main Board 5VSB	5.065	0.167	0.846
Main Board +12V	12.190	0.165	2.011
Main Board Power Consumption			12.628

D. Idle

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.384	1.036	3.506
Main Board +5V	5.081	1.177	5.980
Main Board 5VSB	5.065	0.174	0.881
Main Board +12V	12.186	0.166	2.023
Main Board Power Consumption			12.390

E. Run C.C. Winstone 2001

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.381	1.027	3.472
Main Board +5V	5.071	1.515	7.683
Main Board 5VSB	5.062	0.173	0.876
Main Board +12V	12.198	0.165	2.013
Main Board Power Consumption			14.044

F. S3 Mode

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	0.000	0.000	0.000
Main Board +5V	0.000	0.000	0.000
Main Board 5VSB	5.085	0.297	1.510
Main Board +12V	0.000	0.000	0.000
Main Board Power Consumption			1.510

VIA EPIA EN 15000
A. Playing DVD – Power DVD 4.0

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.377	1.061	3.583
Main Board +5V	5.059	1.930	9.764
Main Board 5VSB	5.057	0.198	1.001
Main Board +12V	12.217	0.201	2.456
Main Board Power Consumption			16.804

B. Playing MP3 – Media Player

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.377	1.062	3.586
Main Board +5V	5.053	2.220	11.218
Main Board 5VSB	5.058	0.207	1.047
Main Board +12V	12.239	0.202	2.472
Main Board Power Consumption			18.323

C. Running Network Application – Files Copy

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.382	1.022	3.456
Main Board +5V	5.067	1.518	7.692
Main Board 5VSB	5.063	0.183	0.927
Main Board +12V	12.222	0.202	2.469
Main Board Power Consumption			14.544

D. Idle

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.385	1.037	3.510
Main Board +5V	5.074	1.278	6.485
Main Board 5VSB	5.066	0.188	0.952
Main Board +12V	12.216	0.204	2.492
Main Board Power Consumption			13.439

E. Run C.C. Winstone 2001


	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	3.380	1.022	3.454
Main Board +5V	5.062	1.717	8.691
Main Board 5VSB	5.061	0.196	0.992
Main Board +12V	12.225	0.201	2.457
Main Board Power Consumption			15.594

F. S3 Mode

	Measured Voltage	Measured Amp.	Watts
Main Board +3.3V	0.000	0.000	0.000
Main Board +5V	0.000	0.000	0.000
Main Board 5VSB	5.083	0.323	1.642
Main Board +12V	0.000	0.000	0.000
Main Board Power Consumption			1.642

Power Specifications

The EPIA EN utilizes an industry standard 20-pin ATX main connector to the power supply. Due to the EPIA EN platform's ultra low power requirements a 90 – 120 Watt ATX power supply is ample for even the heaviest of multimedia system applications.

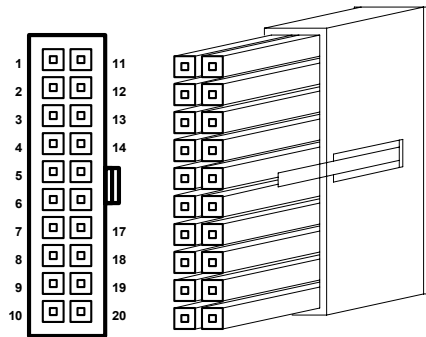

1	+3V	11	+3V
2	+3V	12	-12V
3	Gnd	13	Gnd
4	+5V	14	PWR_ON-
5	Gnd	15	Gnd
6	+5V	16	Gnd
7	Gnd	17	Gnd
8	PWR_GD	18	NC
9	5V_SB	19	+5V
10	+12V	20	+5V

Note: NC = no connection

VIA EPIA EN-Series Microsoft and Linux Driver Support

Microsoft Driver Support

VIA EPIA EN series offers full support for the complete range of Microsoft operating systems.

For standard operating systems, Windows 98/Me/2000/XP latest drivers downloads can be found in the VEPD website at www.viaembedded.com.

For embedded operating systems, Windows CE.NET and XP Embedded related driver supports can be found in the VIA Arena website at www.viaarena.com.

Linux Driver Support

VIA EPIA EN mainboards have a very high degree of support under Linux.

Support and drivers are provided through various methods including:

- Drivers provided by VIA
 - Using a driver built into a distribution package
 - Visiting VIA Arena website at www.viaarena.com for latest updates on a monthly basis
- Installing a third party driver (such as the ALSA driver from the Advanced Linux Sound Architecture project for integrated audio)

For OEM clients and system integrators developing a product for long term production, other code and resources may also be made available. You can submit a request either through the [Developers portal](#) on VIA Arena, or through your VEPD support contact. Alternatively, VIA can work further towards providing additional drivers to suite your specific needs.

Contact

For more information on the VIA EPIA EN-Series Mini ITX Mainboard contact your sales representative or visit our website at www.viaembedded.com

USA

440 Mission Court, Suite 220
Fremont, CA 94539
Tel: (510) 683 3300
Fax: (510) 687 4654
Email: vpsd_sales@viatech.com

Germany

Mottmann Strasse 12
53842 Troisdorf-Oberlar
Tel: 2241 397780
Fax: 2241 3977819
Email: sales@via-tech.de

Taiwan

1F, No. 531, Chung Cheng Road
Hsin Tien, Taipei 231
Tel: (02) 2218 5452
Fax: (02) 2218 5453
Email: mkt@via.com.tw

China

6F, DAscom Tower
9 Shangdi East Road
Haidian District
Beijing, 100085
Tel: 10 6296 3088
Fax: 10 6297 2929
Email: vpsdbj@viatech.com.cn